

NOTES:

All materials shall be provided by Rhino Marking and Protection Systems Inc., as listed or approved equivalent by the engineer

Physical Description:

The marker post shall be 4" wide across with one supportive rib and two decal guides. Each post must be pointed at the end with an overall length determined by specific application.


Performance:

Marker post shall be UV stable and capable of withstanding direct sunlight for at least 10 years without cracking or significant fading. Post driven to a minimum depth of 18" will withstand impacts at speeds of up to 60 mph and return to standing.

Post shall be corona or flame treated prior to decal installation to ensure maximum adhesion. Decals shall not significantly fade, crack, or curl for at least 10 years.

Installation:

Post shall be installed using manufacturer approved post drivers and should be driven to a depth of at least 18". Pilot hole drivers may be used in hard packed soils.

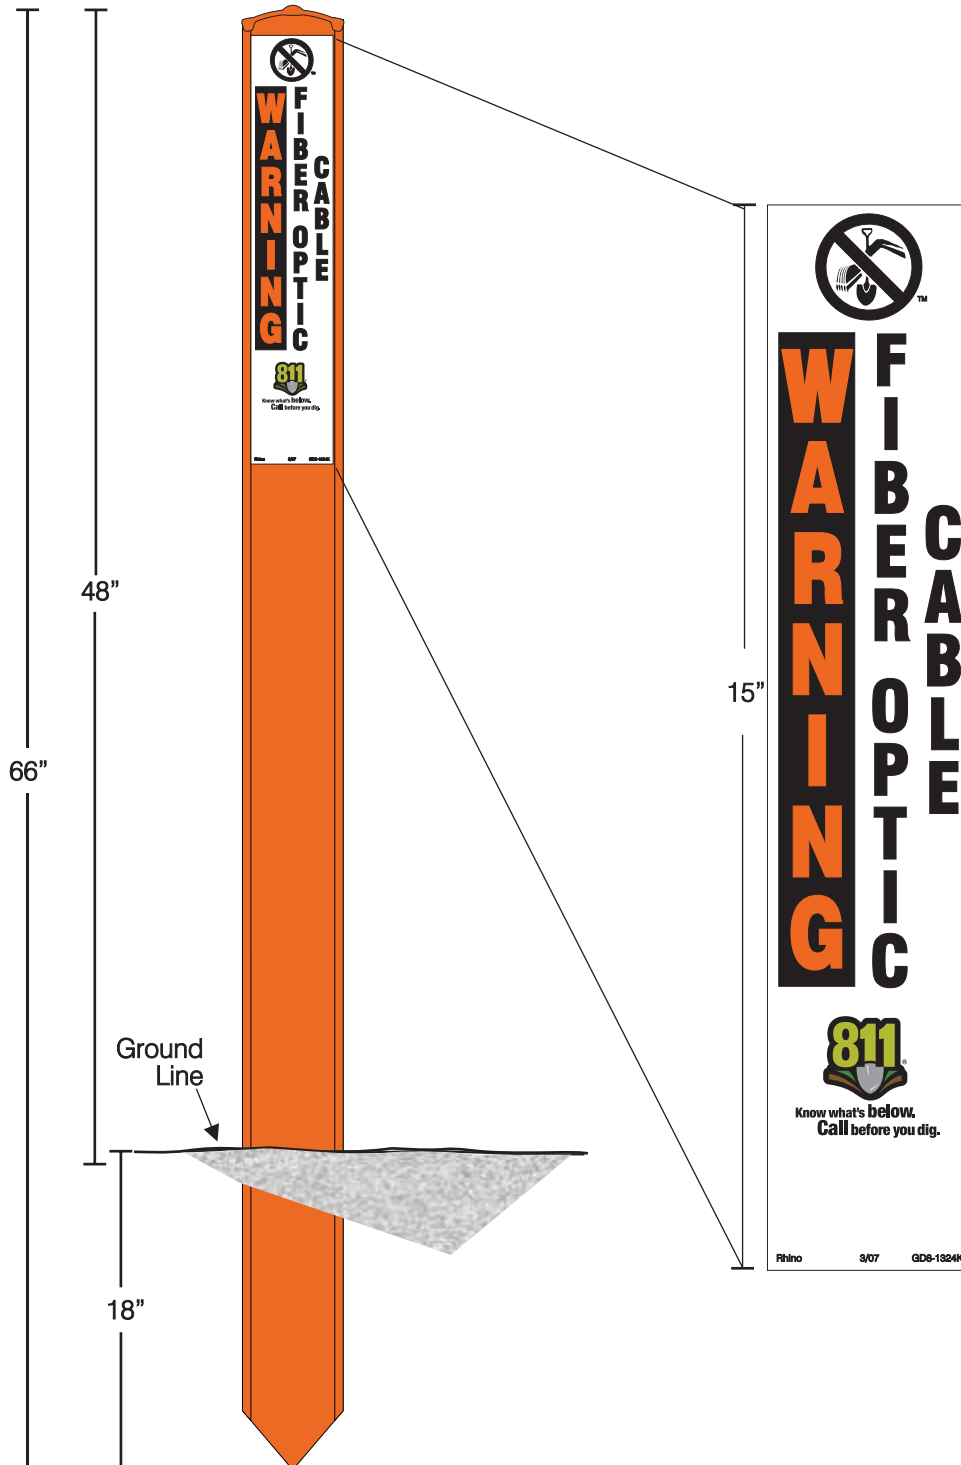

Parts List

- 1 - Rhino Hybrid 3-Rail #RPH66O-3
- 1 - Rhino Decal #TBD
DECAL TO BE FACTORY PLACED

RHINO 3-RAIL
HYBRID MARKER POST